



STADTREAT WBA® ABSORBENT PANEL



Image of 60x60cm model Ref..WBA060 (on the left) and 60x60cm models applied (ambient image).


DESCRIPTION

The STADTREAT WBA® is a medium-frequency absorbent panel which is meant to be placed on walls or normal or T-type ceilings.

This absorbent panel has been developed by combining an adequately shaped high density polyurethane foam box with a filling composed of a material that was exclusively manufactured for this panel in order to increase its sound absorption coefficient.

The outer finishing plate is made of a porous and permeable pressed mineral granulate, which is highly absorbent in the medium and high frequencies, thus making this panel very balanced as regards absorption/frequency.

TECHNICAL DRAWINGS




FEATURES

- NRC: **0.66/m²**.
- Made of recycled materials.
- Plate of pressed granulated minerals.
- Fire-resistance: M1.
- Walls and T-ceilings ready applications.
- Package: 4 units.
- Installation: accessories included.
- Available in 6 colours.

MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
WBA060	60 cm	60 cm	8 cm	3.9 Kg
WBA060/AT ◀	60 cm	60 cm	8 cm	9.1 Kg


ABSORPTION COEFFICIENT

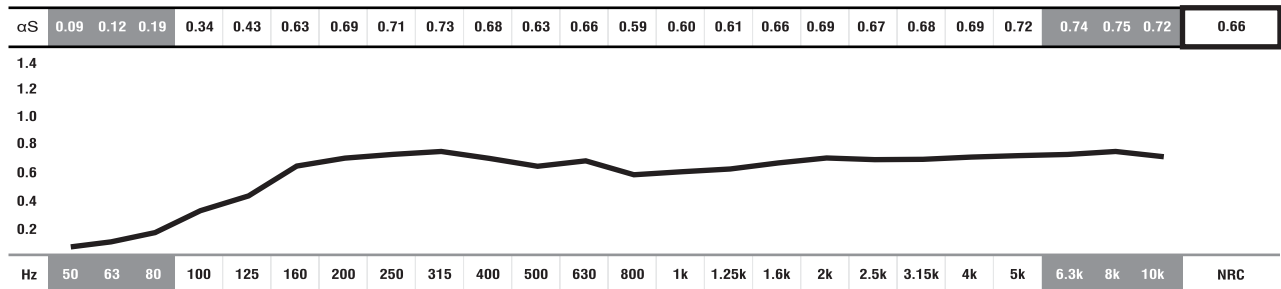

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [<100Hz and > 5K] are Non Standard Values.

STANDARD MINERAL GRANULATED COLOURS



IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- RAL® is an international independent colour standard system partner for industry, trade, architecture and design. Should be consulted before placing any order.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.