



### Controls and Features

- Intended for flush mounting
- High quality loudspeaker, automatically muted when the microphone is activated
- Built-in power amplifier, with internally adjustable level control

### Connectivity

- 8-pin shielded modular RJ45 jack

### Description

The LS5500 Delegate Loudspeaker Panel is intended for flush mounting and is used to equip each delegate station with its own speaker.

In combination with the wide frequency response, the speaker produces an even soundfield which highly increases intelligibility.

The high quality speaker is protected by a metal grid.


*Custom built versions are available upon request.*

### Accessories

- Connection Cable CSC with shielded modular RJ plug to connect to INT5500 Delegate Controller Interface

CSC5/0.5	0.5m	(71.67.5105)
CSC5/1	1m	(71.67.5110)
CSC5/2	2m	(71.67.5120)
CSC5/3	3m	(71.67.5130)

## Dimensions

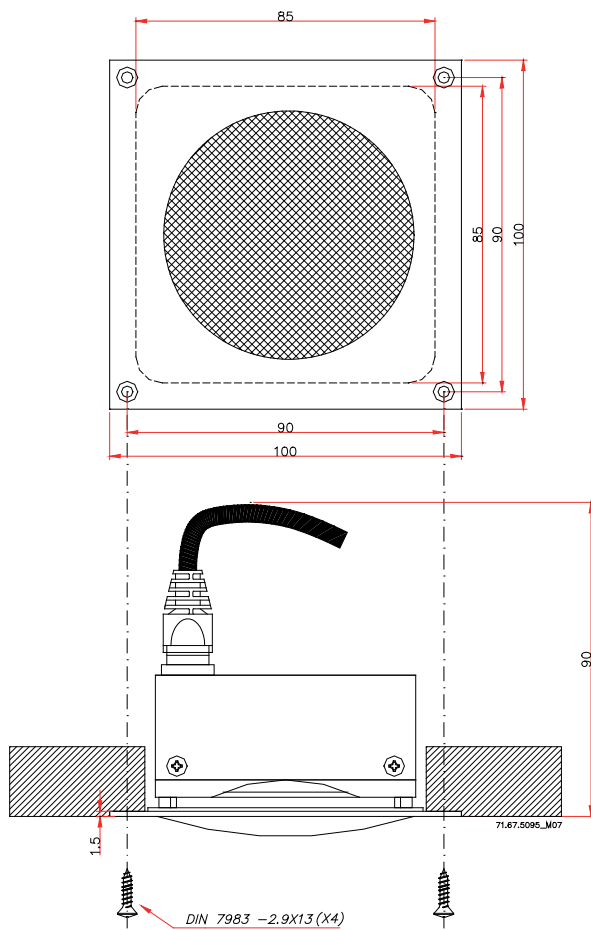

## Specifications

Technical Data	
Dimensions (mm)	100 (h) x 100 (w)
Cut-out (mm)	85 (h) x 85 (w) approx.
Weight (g)	+/- 410
Colour	RAL7021 (Matt Black)
Front plate	Steel
Rated speaker power	30 W
Amplifier power	1 W
Part Number	71.67.5095