




SM1001p | Install Instructions For: SM1001p Powered Subwoofer

The SM1001p ships without mounting accessories.

Optional accessories include:

1. Surface Mount Bracket (AC-SM1001p-S)
2. Corner Mount Bracket (AC-SM1001p-C)

Mounting brackets include mounting instructions.

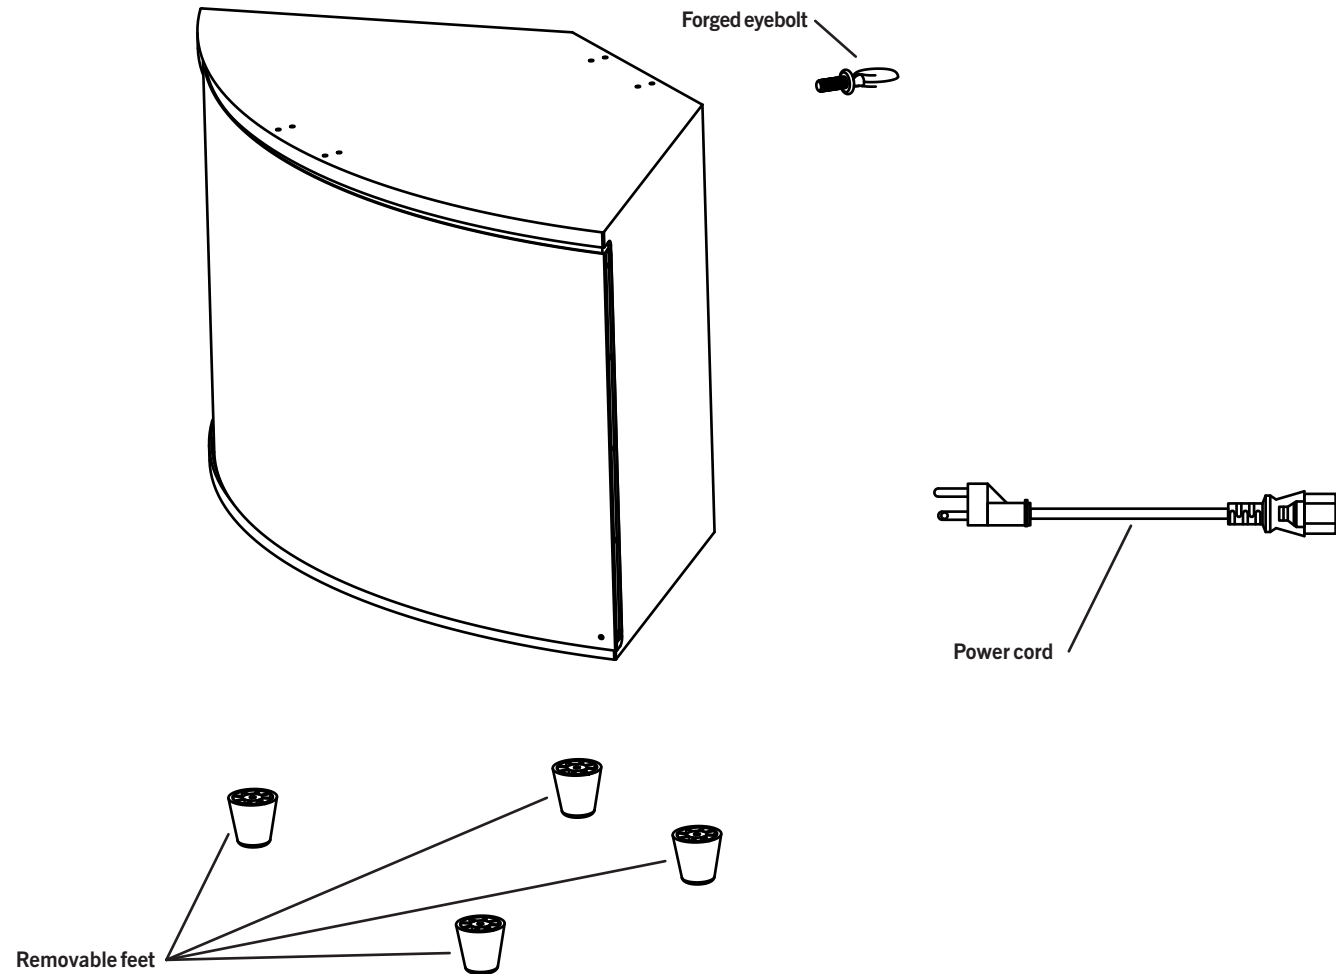


Box contents: SM1001p

- 1 Subwoofer
- 4 Removable feet
- 1 Power cord
- 1 Forged eyebolt
- 1 Seismic cable
- 3 Zip ties


© 2010 SoundTube Entertainment, Inc. All rights reserved. PN SM1001p Rev07.13.10

<p>Warning</p> <p>SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.</p>	<p>Warning</p> <p>Do not spec or install speaker near support beam, ventilation duct or other structure that may interfere with speaker function or dispersion.</p>
---	--


SM1001p | Floor-mount Installation For: SM1001p Powered Subwoofer

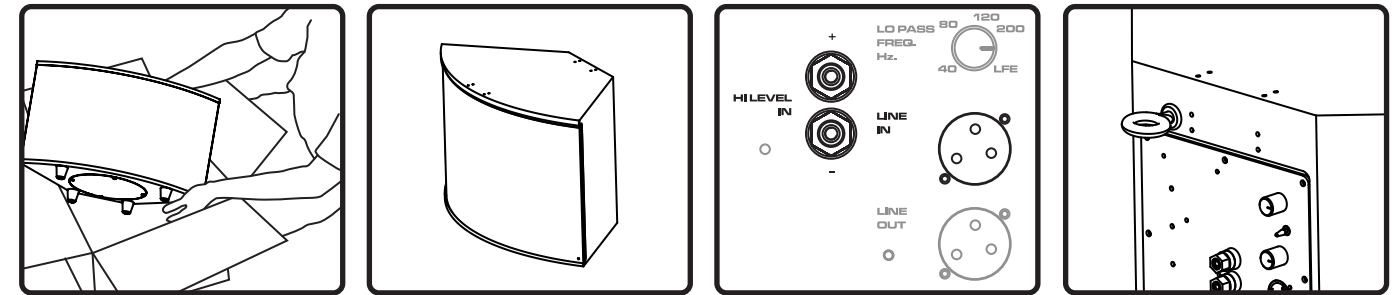

1. Unpack subwoofer.
2. Place in desired location.
3. Connect signal wire to either the balanced XLR input or the 70.7 V binding post.
4. For a safety cable attachment, screw the forged eye bolt into the 1/4-20 inserts on the back of the speaker. Attach included safety cable from forged eyebolt to secure mounting point on structure. Installer to supply structural fastener.

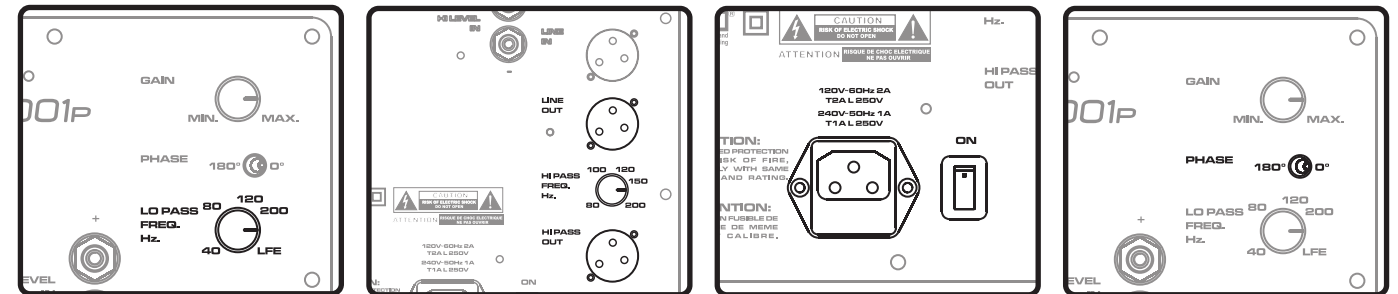

5. Set the low-pass filter with the user-adjustable knob. The low pass filter ranges from 40 Hz - 200 Hz with over-toggle to full range (LFE).
6. If signal pass-through is desired, connect the signal output to either the full range pass-through or the user-adjustable high pass output (40 Hz - 200 Hz) using the balanced XLR outputs. Note: The 70v input does not pass signal through the balanced XLR outputs.
7. Plug in the power cord, and turn the unit on. The SM1001p senses when no signal is present, and powers down to conserve energy.
8. For optimal subwoofer performance, set phase switch to either 0° or 180° (bass will be more rich when set correctly for the installation).

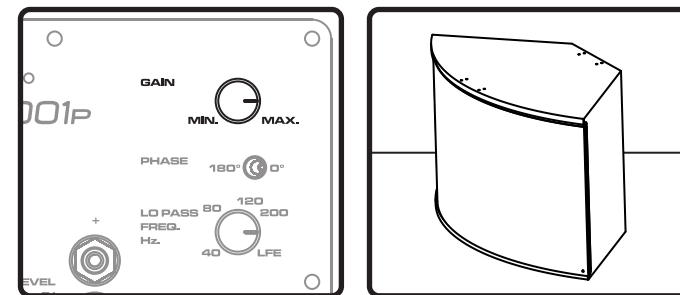

9. Set gain.
10. Done!




AC-SM1001p-C

Install Instructions For:
SM1001p Powered Subwoofer Corner Mount Bracket

For wiring instructions, consult SM1001p installation instructions.
Alternate optional accessory is a surface mount bracket (AC-SM1001p-S).

Security screw —

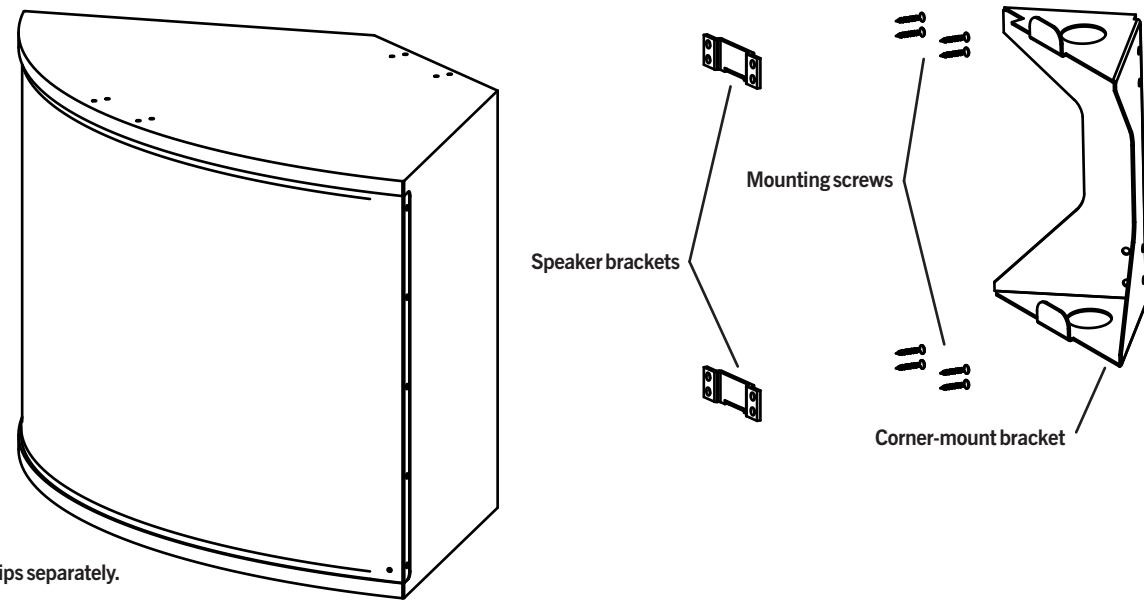

Note: Speaker ships separately.

Box contents: Corner-mount kit

- 1 Corner-mount bracket
- 2 Speaker brackets
- 8 Fasteners (1/2 inch wood screws)
- 1 Security screw


© 2010 SoundTube Entertainment, Inc. All rights reserved. PN SM1001p-C Rev07.13.10

<p> Warning</p> <p>SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.</p>	<p> Warning</p> <p>Do not spec or install speaker near support beam, ventilation duct or other structure that may interfere with speaker function or dispersion.</p>
--	---


AC-SM1001p-C

Corner-mount Installation For:
SM1001p Powered Subwoofer


1.435.647.9555 | 800.647.TUBE | www.soundtube.com




1. Unpack subwoofer and unscrew 4 feet. Remove screws from rubber plugs and replace screws to fill holes.




2. Choose a secure corner and mount bracket with tabs pointing up. Corner mount bracket must be mounted at least 3 inches below ceiling, beam or other top structure. Bracket accepts up to 1/4 inch lag bolts (installer supplies fasteners). **Be sure mounting tabs point up.**




3. Mount speaker brackets to back of speaker with tabs pointing down. Use included 1/2 inch wood screws.

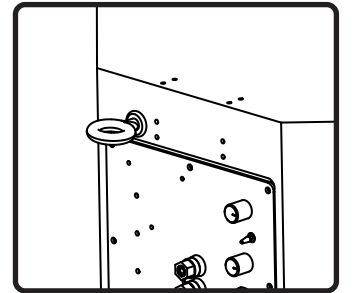


4. For a safety cable attachment, screw the forged eyebolt into the 1/4-20 insert on the back of the speaker and attach included safety cable from forged eyebolt to a secure mounting point on the structure. Installer to supply fasteners to structure.




5. Run wires through hole in top or bottom of bracket. Connect wires and set gain and filters as described in the SM1001p installation instructions.



6. Slide speaker onto pre-mounted bracket.



7. Install security screw.

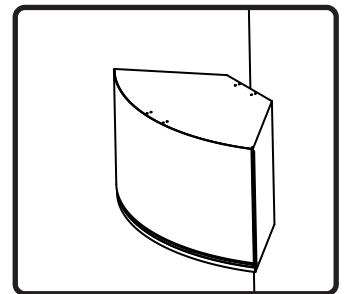


8. Done!



AC-SM1001p-S | Install Instructions For:
SM1001p Surface Mount Bracket

For wiring instructions, consult SM1001p installation instructions.
Alternate optional accessory is a corner mount bracket (AC-SM1001p-C).

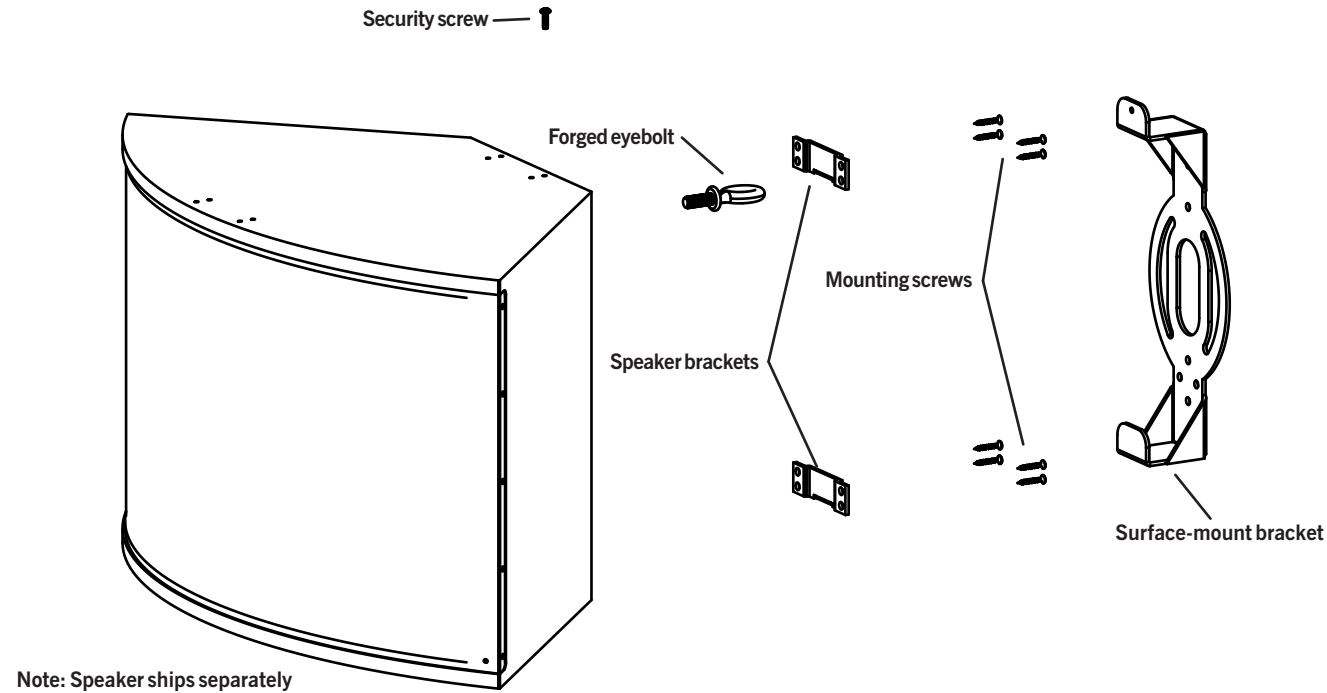

Box contents: Surface-mount kit

- 1 Surface-mount bracket
- 2 Speaker brackets
- 8 Fasteners (1/2" wood screws)
- 1 Security screw

© 2010 SoundTube Entertainment, Inc. All rights reserved. PN SM1001p-S Rev 07.13.10



Warning


SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.




Warning

Do not spec or install speaker near support beam, ventilation duct or other structure that may interfere with speaker function or dispersion.


AC-SM1001p-S | Install Instructions For:
SM1001p Surface Mount Bracket




1. Unpack subwoofer and unscrew 4 feet. Remove screws from rubber plugs and replace screws to fill holes.




2. Choose a secure mounting surface with sufficient strength to reliably hold the speaker. Surface-mount bracket must be mounted at least 3 inches below ceiling, beam or other top structure. Bracket accepts 1/4 inch lag bolts (installer to supply fasteners). **Be sure mounting tabs point up.**




3a. Outward aiming: Mount speaker brackets to back of speaker with tabs down. Use included 1/2 inch wood screws.

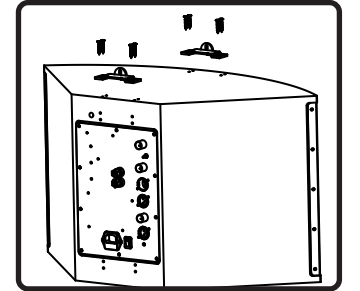


3b. Downward aiming: Mount speaker brackets to top of speaker with tabs facing front of speaker. Use included 1/2 inch wood screws.




4. For a safety cable attachment, screw the forged eye bolt into the 1/4-20 inserts on the back of the speaker. Attach from included safety cable from forged eyebolt to secure mounting point on structure. Installer to supply fastener to structure.

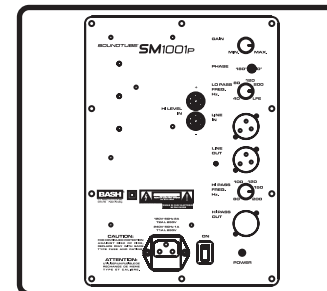


5. Connect wires and set gain and filters as described in the SM1001p installation instructions.



6. Slide speaker onto pre-mounted bracket.

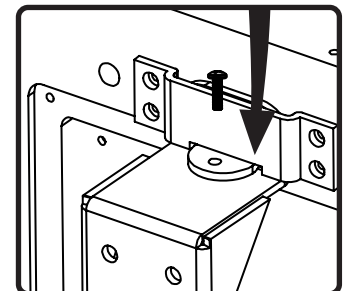

7. Install security screw.



8. Done!