



IW Series


Install Instructions For:
IW500i and IW500b speaker

1.435.647.9555 | 800.647.TUBE | www.soundtube.com

Box contents

- 1 Speaker
- 1 Grille
- 1 Paint mask
- 1 Cutout template

IW500b - includes
2 wire nuts
1 conduit clamp

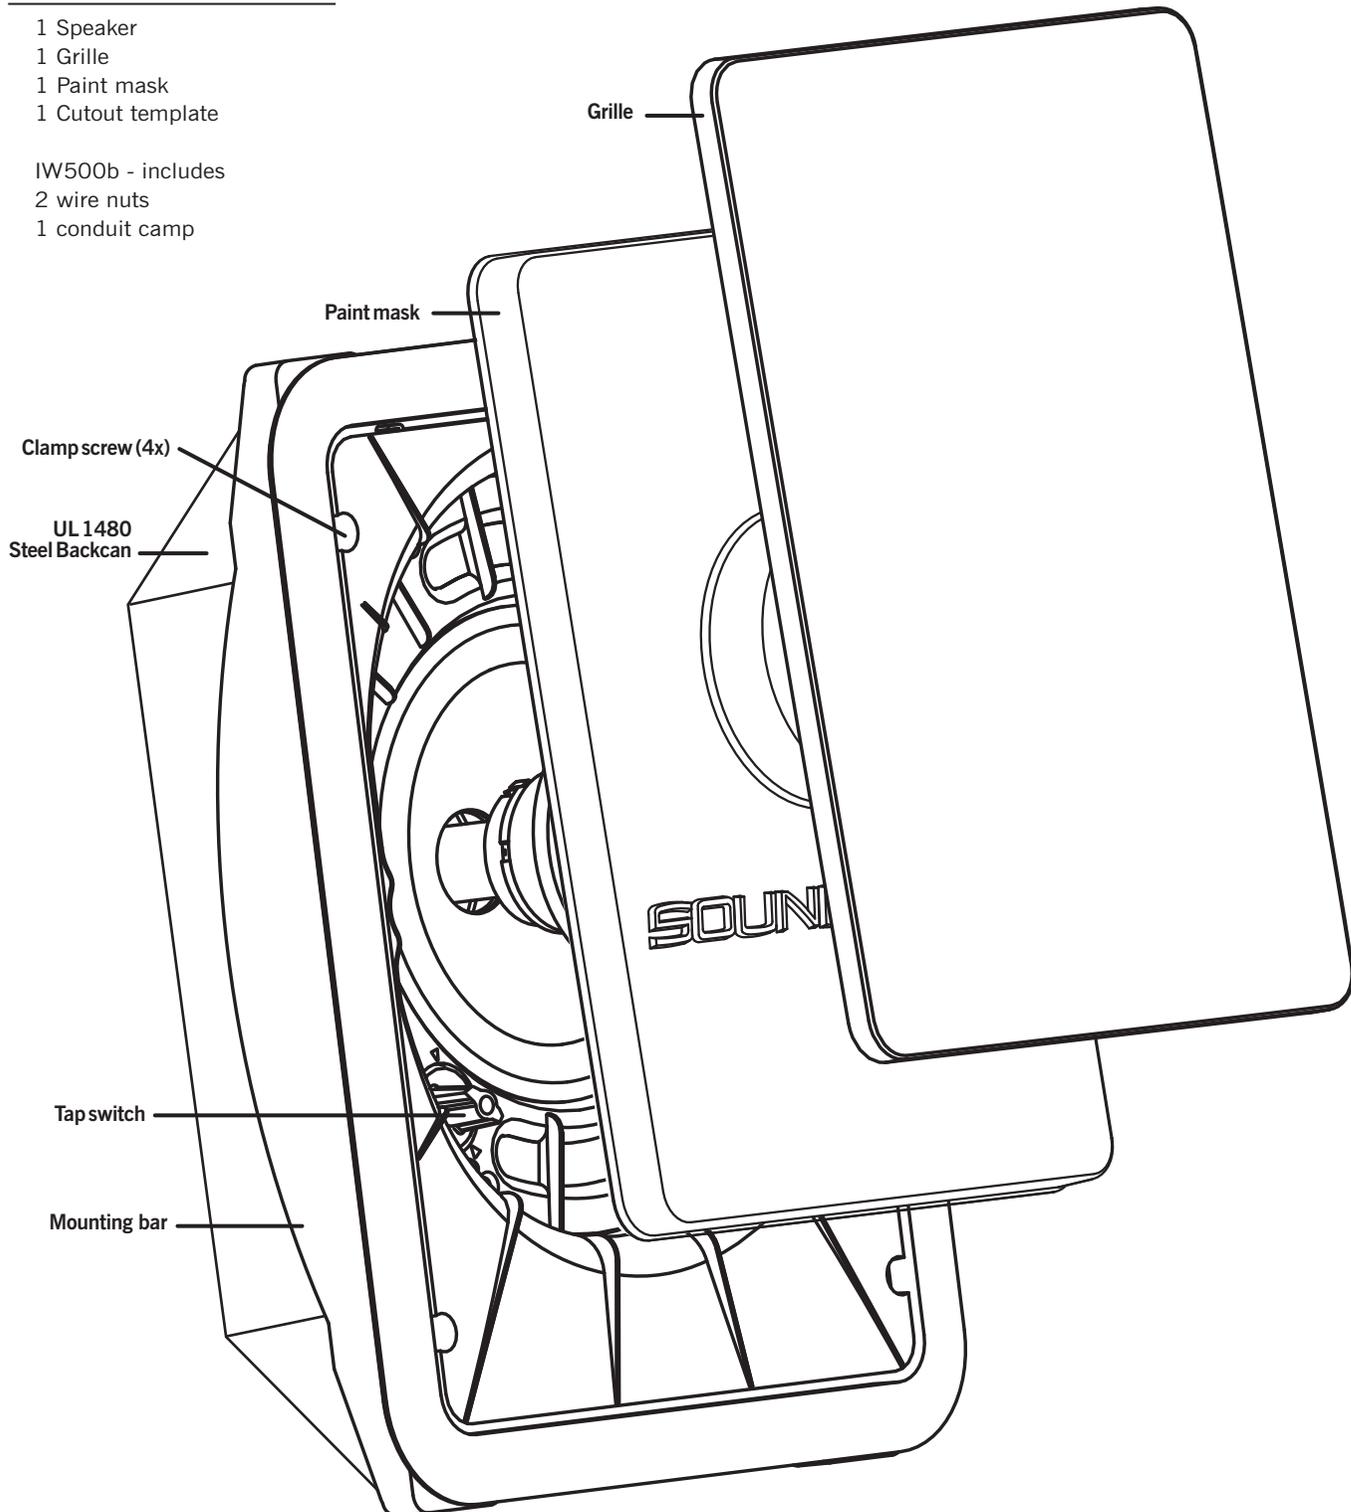

IW500b: Steel signaling speaker enclosure listed UL 1480


© 2006 SoundTube Entertainment, Inc. All rights reserved. PN INS-IW500 Rev 01.04.08

Warning


SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.

Warning


Do not spec or install speaker near support beam, ventilation duct or other structure that may interfere with speaker function or dispersion.

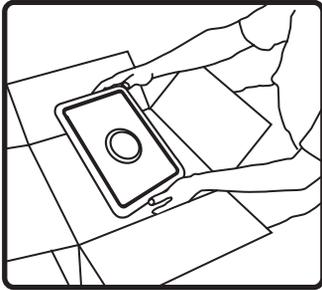

1. Unpack speaker and grille. Leave paint mask in place until speaker is ready to install.

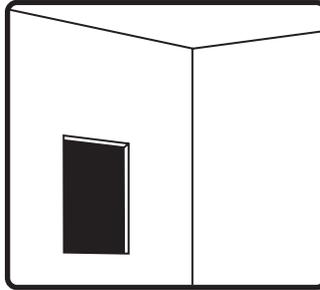


2. Use provided cut out template to make hole. Use Rotozip or other tool to cut hole in wall. Hole size, 7.5" x 10.75"

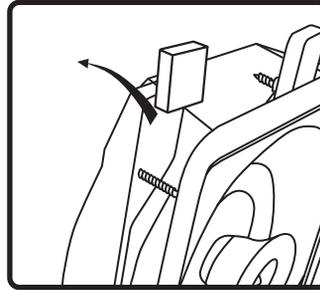


3. Remove styrofoam inserts between mounting bars and speaker baffle. (4x)

IW500i

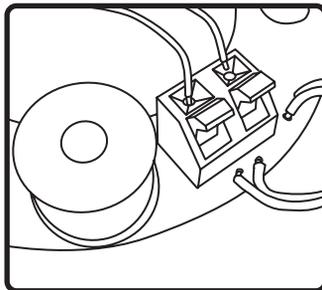


4. Connect speaker wires to terminals on rear of speaker.


IW500b-Backcan

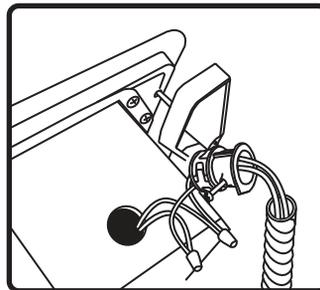


4. Connect speaker wires to wire leads using wirenuts. Push wire nuts into backcan and insert conduit clamp.

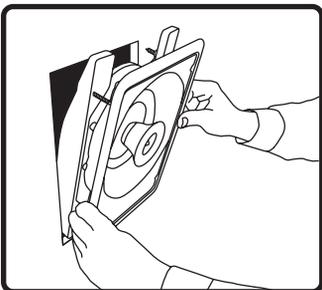


5. Insert speaker in to hole (bottom first) with mounting bar on inside of wall.

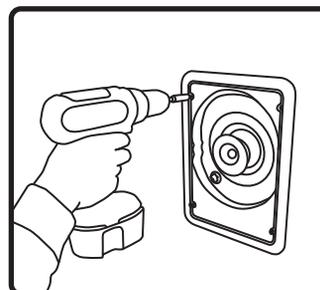

6. Remove paint mask. Then tighten the four clamping screws. DO NOT OVER TIGHTEN.

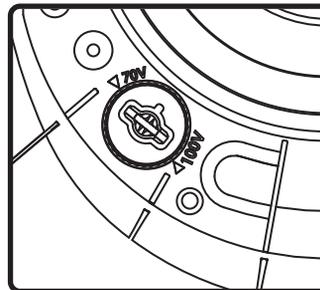

7. Adjust tap switch to proper setting. Switch is preset to maximum tap setting in 70.7 V mode (33 W)

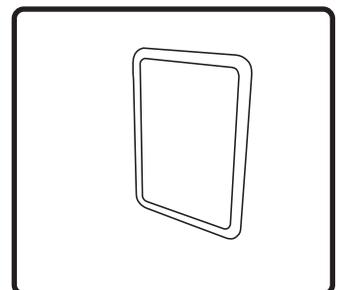

Note: Replace paint mask if painting wall after speaker is installed.
8. Insert Grille into lip of bezel and press gently into place.