



FOAMSORB® / INVERTED

ABSORBENT PANEL

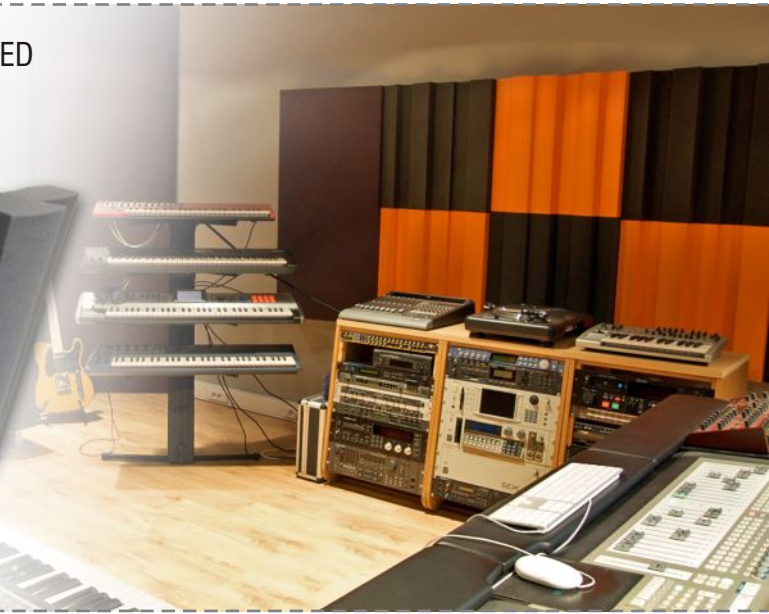


Image of 60x60cm models Ref.:FSO060 and Ref.:FSI060 (on the left) and Ref.:FSO060 and Ref.:FSI060 applied (ambient image).

DESCRIPTION


The FOAMSORB INV® absorption panels are ATP® registered products and the real mid-range absorbers from our collection. They are made of high-quality controlled-cell, self-extinguishable M1 fire-retardant acoustic foam.

The FOAMSORB INV® panels present a unique and elegant design; the male and female pieces help solve many of the rooms' acoustic anomalies.

These panels have a high absorption coefficient in the broad range of the sound spectrum, and are significantly efficient at absorbing medium-low frequencies.

In general terms, they work well on flat walls and ceilings. They can be combined with the WAVYFUSER INV® diffusion panels, which have the same shape, thus giving music rooms a truly balanced continuous acoustic treatment surface and a fine-looking design.

TECHNICAL DRAWINGS

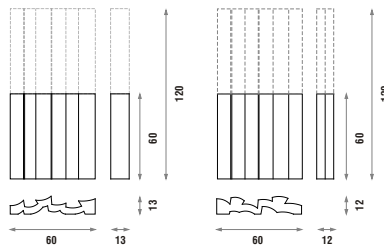


FEATURES

- NRC: 0.95/m² [$>250\text{Hz}; <10\text{kHz}$].
- Great decorative alternatives.
- Raw material: melamine resin or standard acoustic foam.
- **MELAMIN RESIN** - Flame resistance: Germany B1, France M1, GB class1, USA V0/HF1.
- **ACOUSTIC FOAM** - Self-extinguishable M1 fire-retardant foam.
- Package: 4 units or 12 units.
- Very easy to install.

MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
FS0120	120 cm	60 cm	13 cm	1.2 Kg
FSI120	120 cm	60 cm	12 cm	1.2 Kg
FSO060	60 cm	60 cm	13 cm	0.6 Kg
FSI060	60 cm	60 cm	12 cm	0.6 Kg

ABSORPTION COEFFICIENT

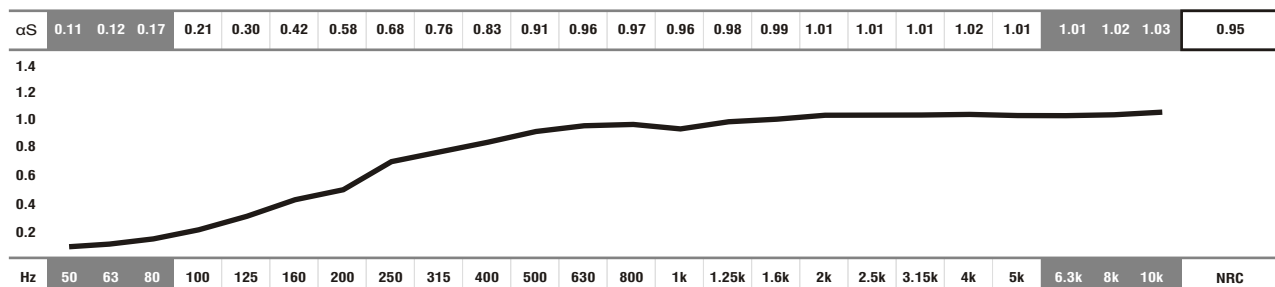

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.

REGULAR AND MELAMIN FOAM COLOURS



IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.

